



"D" ARCH DIMENSIONS
(APPROXIMATE)



"D" ARCH OVERLAP DETAIL

NOTES:

1. MATCH SIDEWALK AT TOP OF CURB AND TOP OF BRIDGE IN 36" TRANSITION.
2. REBAR AT ENDS REQUIRED
3. ADJUST DIMENSIONS TO FIT IF REQUIRED.
4. DRIVEWAY BRIDGE SHALL BE 5' WIDER THAN DRIVEWAY, DISTRIBUTED 2'-6" ON EACH SIDE OF DRIVEWAY.
- 5- INSTALL ASPHALT RAMP AS REQUIRED.

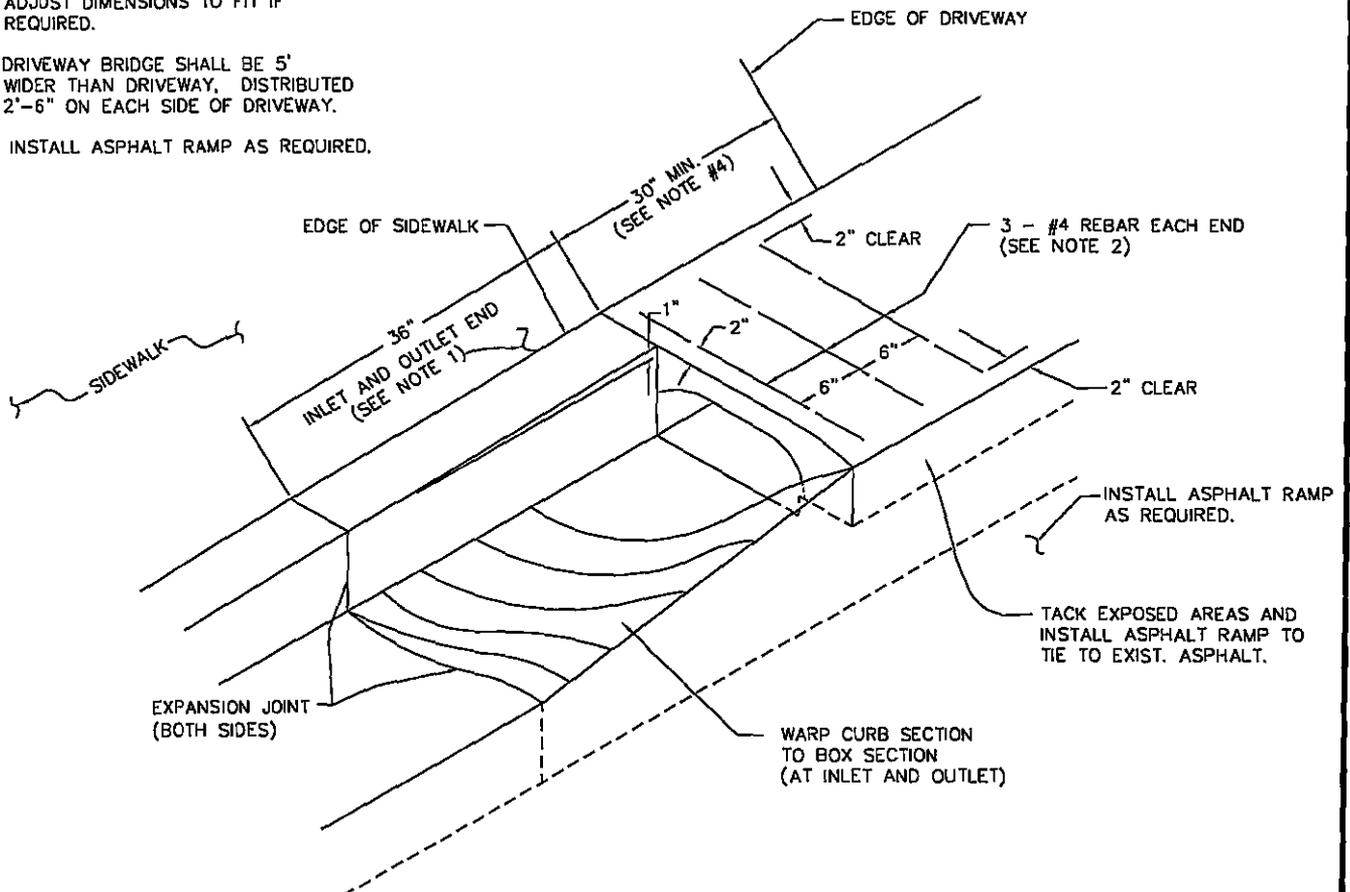

(FOR USE WITH HB 30-8 CURB AND GUTTER ONLY)

CITY OF ST. GEORGE ENGINEERING DEPARTMENT

STANDARD DRIVEWAY BRIDGE

REVISIONS		
DATE	DESCRIPTION	BY

STANDARD DWG. NO.	
112	1 OF 1
APPROVED:	
DATE:	BY: LBB